

Why SPECTRA-GLAZE® II units . . .

Because they provide superior cleanability without requiring a high gloss surface.

Because the pleasing satin finish is

EASY TO CLEAN



**EASY TO KEEP CLEAN,
RESISTS MARKING**

**EASY FOR THE MASONS
TO CLEAN DOWN**

with excellent color constancy.

Six years of research produced this major technical breakthrough — while retaining all traditional benefits of SPECTRA-GLAZE® units.

Ideal for schools, food & beverage plants, hospitals, power stations, transportation buildings, sewage & water treatment plants, industrial/commercial buildings, institution & government projects.

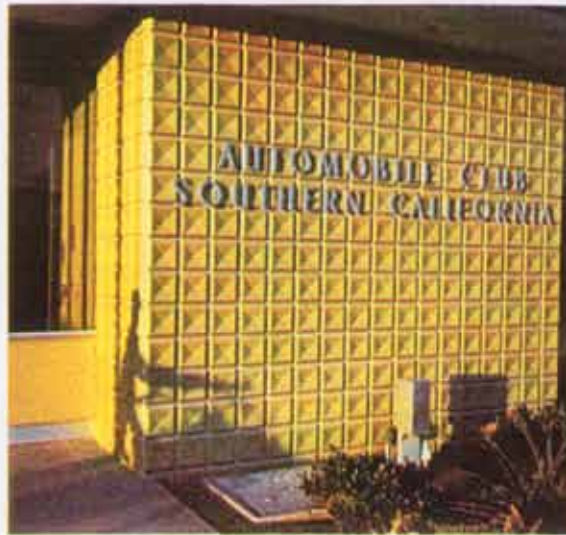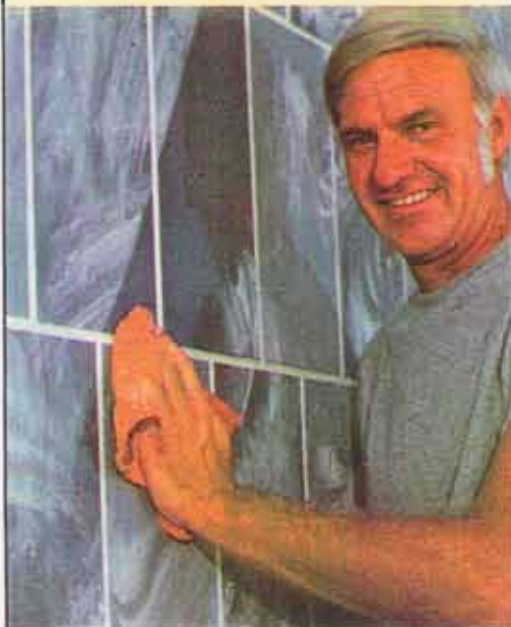

Description

SPECTRA-GLAZE® units are light-weight concrete blocks glazed on one or more faces with a permanent surface in a wide range of colors.

Never needs refurbishing.

Factory finished, thus reducing number of job-site trades required for loadbearing or partition walls.

Plane, sculptured and scored faces.

8 x 16, 8 x 8, 4 x 16 face sizes.

1", 2", 4", 6", 8", 10", 12" thickness.

A wide variety of shapes.

For special sizes & types, check nearest Manufacturer.

Advantages

APPEARANCE

- Full spectrum of 48 standard colors.
- Scored units permit a wide choice of scale and pattern.
- Sculptured faces provide additional creative opportunities.
- Close dimensional tolerances allow precise stack bond.
- Flat ends permit soldier coursing.

PERFORMANCE

- Face cannot be removed without destroying the block itself.
- Cannot peel or blister.
- High impact resistance.
- Facing ductility eliminates crazing, reduces chipping.
- Superior abrasion resistance.
- Color-fast for interior use.
- Many colors show good resistance to exterior exposure.
- Units provide fire ratings of the concrete block: 1, 2, 3 or 4 hours.

• Large cores permit use of granular fill to increase fire resistance & insulation values. Walls easily reinforced.

• Highly resistant to chemicals, urine, blood, steam & cleaning compounds, etc.

• Meets USDA & OSHA requirements for sanitary walls.

COST

• Thru-wall loadbearing units eliminate expense of back-up wall.

• 4" unit saves 2" of floor space, compared to the two-wythe 6" partition required for some other products.

• Utilities easily installed.

• Surface-mounted cove base eliminates need for costly floor recess.

• Two-face units in 4", 6", and 8" thicknesses. Different colors on opposite faces if desired.

• Lower insurance rates from fire protection of light-weight block.

• Minimum maintenance.

• Fast delivery. Fast construction.